

# ECS-9210

Quad Core Intel® Core™ i7/ i5/ i3 (Skylake-S) Fanless Embedded System with Intel® C236, 6 GigE LAN with 4 PoE+, 2 Front-access SSD Tray, 1 PCIe x16, 3 SIM, 8 USB 3.0, M2DOM, M.2 Socket, Isolated DIO, High Performance, Rugged, -40°C to 75°C Extended Temperature



## Features

- LGA 1151 Socket supports Quad Core Intel® Core™ i7/ i5/ i3 Processor (Skylake-S) with C236 Chipset
- DVI-I, DVI-D and DisplayPort display interface, up to 4K displays
- Fanless, -40°C to 75°C Operating Temperature
- 6 Independent GigE LAN with 4 IEEE 802.3at PoE+, iAMT 11.0
- Expansion : 1 PCIe x16, 3 Mini PCIe/ mSATA, 1 M.2
- PCIe x16 expansion supports up to 160W Power Budget
- Storage : 2 2.5" SSD Tray, 1 CFAST, 1 M2DOM, 2 SATA III
- 3 External SIM Socket for 3G/ 4G/ LTE/ WiFi/ GPRS/ UMTS
- 32 Isolated DIO, 8 USB 3.0
- 6V to 36V DC Power Input with 80V Surge Protection
- Configurable Ignition Power Control




## Specifications

System	
<b>Processor</b>	Intel® Core™ i7-6700/ i7-6700TE/ i5-6500/ i5-6500TE/ i3-6100/ i3-6100TE Processor (Skylake-S)
<b>Chipset</b>	Intel® C236
<b>BIOS</b>	AMI
<b>SIO</b>	IT8786E
<b>Memory</b>	2 DDR4 2133MHz SO-DIMM, up to 32GB
I/O Interface	
<b>Serial</b>	4 COM RS-232/ 422/ 485
<b>USB</b>	<ul style="list-style-type: none"> <li>▪ 8 USB 3.0 (External : 4 Front, 4 Rear)</li> <li>▪ 1 USB 2.0 (Internal)</li> </ul>
<b>Isolated DIO</b>	32 Isolated DIO : 16 DI, 16 DO
<b>LED</b>	Power, HDD, Wireless, PoE
<b>SIM Card</b>	3 SIM Card Socket (External)
Expansion	
<b>Mini PCIe</b>	3 Full-size Mini PCIe Socket for PCIe/ USB/ External SIM Card/ mSATA
<b>PCI/ PCIe</b>	1 PCIe x16 Slot (Up to 160W Power Budget)
<b>M.2</b>	1 M.2 Socket (Key ID : M)
Graphics	
<b>Graphics Processor</b>	Intel® HD Graphics 530
<b>Display Memory</b>	Shared Memory, up to 1.7GB
<b>Interface</b>	<ul style="list-style-type: none"> <li>▪ DVI-I : Up to 1920 x 1200 @ 60Hz</li> <li>▪ DVI-D : Up to 1920 x 1200 @ 60Hz</li> <li>▪ DisplayPort : Up to 4096 x 2304 @ 60Hz</li> </ul>
Storage	
<b>SATA</b>	2 SATA III (6Gbps) support S/W RAID 0, 1
<b>mSATA</b>	3 SATA III (Mini PCIe Type, 6Gbps)
<b>M2DOM</b>	1 PCIe 3.0 (8GT/s)
<b>Storage Device</b>	<ul style="list-style-type: none"> <li>▪ 1 CFAST Socket, Push-in/ Push-out Ejector</li> <li>▪ 2 Front-access 2.5" SSD/ HDD Tray</li> </ul>
Audio	
<b>Audio Codec</b>	Realtek ALC892, 5.1 Channel HD Audio
<b>Audio Interface</b>	1 Mic-in, 1 Line-out
Ethernet	
<b>LAN 1</b>	Intel® I219LM GigE LAN supports iAMT 11.0
<b>LAN 2</b>	Intel® I210 GigE LAN


PoE	
<b>LAN 3</b>	GigE IEEE 802.3at (25.5W/48V) PoE+ by Intel® I210
<b>LAN 4</b>	GigE IEEE 802.3at (25.5W/48V) PoE+ by Intel® I210
<b>LAN 5</b>	GigE IEEE 802.3at (25.5W/48V) PoE+ by Intel® I210
<b>LAN 6</b>	GigE IEEE 802.3at (25.5W/48V) PoE+ by Intel® I210
Power	
<b>Power Input</b>	6V to 36V, DC-in
<b>Power Interface</b>	<ul style="list-style-type: none"> <li>▪ 3-pin Terminal Block : V+, V-, Frame Ground</li> <li>▪ Mini-DIN 4-pin</li> </ul>
<b>Ignition Control</b>	16 Mode (Internal)
<b>Remote Switch</b>	3-pin Terminal Block : On, Off, IGN
<b>Surge Protection</b>	Up to 80V/1ms Transient Power
Others	
<b>TPM</b>	Optional Infineon SLB9665 supports TPM 2.0, LPC Interface
<b>Watchdog Timer</b>	Reset : 1 to 255 sec./min. per step
<b>Smart Management</b>	Wake on LAN, PXE supported
<b>HW Monitor</b>	Monitoring temperature, voltages. Auto throttling control when CPU overheats.
Software Support	
<b>OS</b>	Windows 10, Windows 8.1, Windows 7, Linux
Mechanical	
<b>Dimensions (W x L x H)</b>	260mm x 215mm x 79mm (10.24" x 8.46" x 3.11")
<b>Weight</b>	4.2 kg (9.26 lb)
<b>Mounting</b>	<ul style="list-style-type: none"> <li>▪ Wallmount by mounting bracket</li> <li>▪ Din Rail Mount (Optional)</li> <li>▪ 2U Rackmount (Optional)</li> </ul>
Environment	
<b>Operating Temperature</b>	<ul style="list-style-type: none"> <li>▪ 35W TDP CPU (i7-6700TE, i5-6500TE, i3-6100TE) : -40°C to 75°C (-40°F to 167°F)</li> <li>▪ 65W TDP CPU (i7-6700, i5-6500, i3-6100) : -40°C to 75°C (-40°F to 167°F)</li> </ul>
<b>Storage Temperature</b>	-40°C to 85°C (-40°F to 185°F)
<b>Humidity</b>	5% to 95% Humidity, non-condensing
<b>Relative Humidity</b>	95% @ 70°C
<b>Shock</b>	<ul style="list-style-type: none"> <li>▪ IEC 60068-2-27</li> <li>▪ SSD : 50G @ wallmount, Half-sine, 11ms</li> </ul>
<b>Vibration</b>	<ul style="list-style-type: none"> <li>▪ IEC 60068-2-64</li> <li>▪ SSD : 5Grms, 5Hz to 500Hz, 3 Axis</li> </ul>
<b>Certification</b>	CE, FCC, EN50155, EN50121-3-2

## Dimensions


Unit : mm/ inch

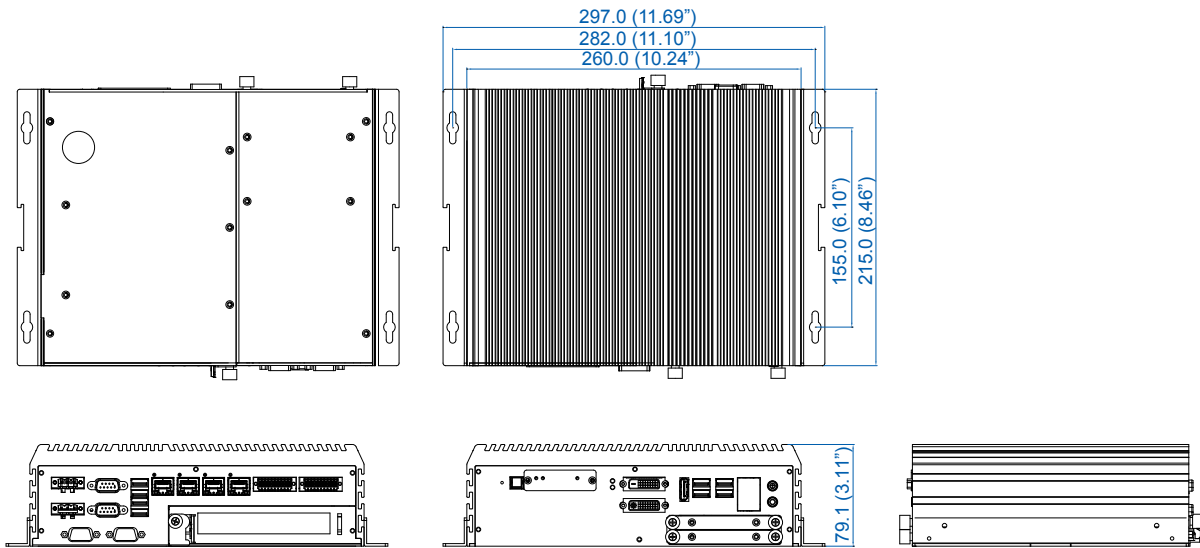

## Front I/O

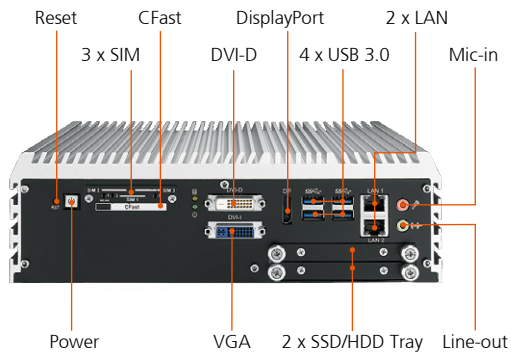

## Rear I/O

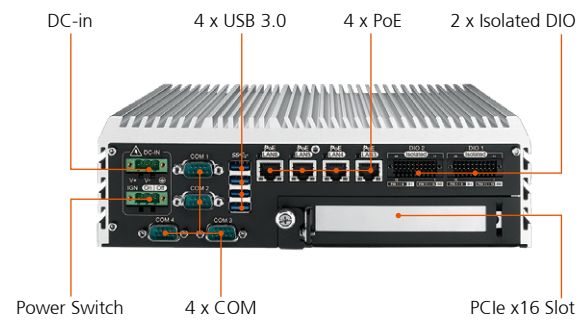

## Order Information

<b>ECS-9210</b>	ECS-9200, 6 GigE LAN with 4 PoE+, 2 Front-access SSD Tray, 1 PCIe x16, 8 USB 3.0, M2DOM, M.2, 3 SIM, Isolated DIO
<b>i7-6700</b>	6th Gen Intel® Core™ i7-6700 Processor (8M Cache, up to 4.00 GHz)
<b>i7-6700TE</b>	6th Gen Intel® Core™ i7-6700TE Processor (8M Cache, up to 3.40 GHz)
<b>i5-6500</b>	6th Gen Intel® Core™ i5-6500 Processor (6M Cache, up to 3.60 GHz)
<b>i5-6500TE</b>	6th Gen Intel® Core™ i5-6500TE Processor (6M Cache, up to 3.30 GHz)
<b>i3-6100</b>	6th Gen Intel® Core™ i3-6100 Processor (3M Cache, 3.70 GHz)
<b>i3-6100TE</b>	6th Gen Intel® Core™ i3-6100TE Processor (4M Cache, 2.70 GHz)
<b>DDR4 16G</b>	Certified DDR4 16GB 2133MHz RAM
<b>DDR4 8G</b>	Certified DDR4 8GB 2133MHz RAM
<b>DDR4 4G</b>	Certified DDR4 4GB 2133MHz RAM
<b>PWA-280W-WT</b>	280W, 24V, 85V AC to 264V AC Power Adapter with 3-pin Terminal Block, Wide Temperature -30°C to +70°C
<b>PWA-160W-WT</b>	160W, 24V, 85V AC to 264V AC Power Adapter with 3-pin Terminal Block, Wide Temperature -30°C to +70°C
<b>VESA Mount</b>	VESA Mounting Kit
<b>DIN-RAIL</b>	DIN Rail Kit
<b>Rack Mount</b>	2U Rackmount Kit
<b>TMK2-20P-100</b>	Terminal Block 20-pin to Terminal Block 20-pin Cable, 100cm
<b>TMK2-20P-500</b>	Terminal Block 20-pin to Terminal Block 20-pin Cable, 500cm
<b>TMB-TMBK-20P</b>	Terminal Board with One 20-pin Terminal Block Connector and DIN-Rail Mounting
<b>3G Module</b>	Mini PCIe 3G/GPS Module with Antenna
<b>4G Module</b>	Mini PCIe 4G/GPS Module with Antenna
<b>WiFi &amp; Bluetooth Module</b>	Intel® Mini PCIe WiFi & Bluetooth Module with Antenna