
🛜 smart vision lights

Connecting multiple Lights

- Strobe control for all lights connected
- Analog intensity for all lights connected
- Male to Female Jumper Cables



Constant spacing between LED's as lights are connected together

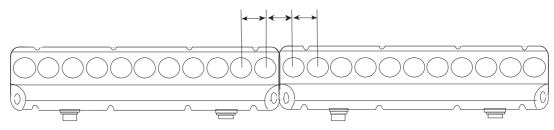

The spacing between the high current LED's is the same between lights as in an individual light. The LED's remain equally spaced between lights. When lights are connected together placing lights end to end there is no uniformity difference measured at a 300mm (12") working distance or further.

L300 and ODL300

Smart Vision Lights • 1887 Holton Rd. • Suite D 353 • Muskegon, MI 49445 •Phone 231.722.1199 www.smartvisionlights.com