

product introduction

The S30 Series of Prox Lights features a single high current LED enclosed in a 30mm Barrel Style Housing. The S30 Series feature an NPN and PNP strobe signal with a 0-10 VDC analog intensity control signal for added versatility. These lights also feature a built in potentiometer for manual intensity control. Each S30 comes potted with a two-part epoxy designed to protect the electronics and provide a sleek finished product. The S30 Series has multiple mounting options allowing for ease of install and comes with two locking bolts.

product features



- 30mm Barrel Style Housing
- M12 Quick Disconnect
- Driver built in – No External wiring to a driver
- PNP and NPN Strobe input
- Continuous operation or Strobe mode
- Dimmable via built in potentiometer
- Analog intensity 0-10VDC signal
- Standard optics provide tight focused light

product specifications

Electrical Input	24 VDC +/- 5%
Current	Max. 250mA
Wattage	Max. 6W
Strobe Input	PNP ▶ +4VDC or greater to activate. NPN ▶ GND (<1VDC) to activate
PNP Line	3.7mA @ 3VDC 6.2mA @ 5VDC 12.6mA @ 10VDC 30.4mA @ 24 VDC
NPN Line	22mA @ Common (0VDC)
Yellow Indicator LED	LED Strobe Indicator ON = Light Active
Green Indicator LED	ON = Power
Continuous Mode	Light will be in continuous mode by leaving signal on strobe input active
Potentiometer	10 turn pot – Intensity control of 10% to 100% Clockwise increases intensity
Analog Intensity	The output is adjustable from 10 -100% of brightness by a 0 -10 VDC signal
Connection	5 pin M12 Integral QD connector
Ambient Temperature	-20° - 50° C (-4° - 122° F)
Lifespan	100,000 hrs
IP Rating	IP50
Compliances	CE and RoHS
Weight	~120g
IEC 62471 Rating	See page 4



product number key

S30 – XXX – X* —» Part Number Key

Product Family:
Prox Light
S30

Color:
365, 395, 470, 505,
530, 625, 850, 940
& WHI (White)

Lenses:
W – Wide
L - Line

* Lights come standard with Narrow lenses

CE and RoHS Compliant



warnings




Attention

Please note that the power requirements are 250mA at 24VDC. Failure to supply light with 250mA will result in non-repeatable lighting. Contact Smart Vision Lights for more information.



wiring configuration



1 – 24V
2 – NPN
3 – GND
4 – PNP
5 – 0-10V

Standard M12 mating cable color code:

BROWN
WHITE
BLUE
BLACK
*GRAY (GREEN/YELLOW)


If Analog 0-10 VDC is not used to control light intensity;
+VDC (24VDC) must be connected to Analog Input - Jumper pin 5 to pin 1

PIN	Wire Color	Function	Signal
1	BROWN	Power	+24 VDC
2	WHITE	NPN Strobe	GND for Active ON
3	BLUE	Ground	GND
4	BLACK	PNP Strobe	4VDC to 30VDC for Active ON
5	GREEN	Analog Intensity Control	0-10 VDC




S30-XXX-N

Working Distance mm (inches)	Pattern (80%-100% measured intensity) mm (Inches)
.5m (19.7")	80mm(~3") D
1m (39.4")	185mm(~7") D
Typical output performance	
Distance = .5 meter	Illumination (Lux) 4200
<i>Illumination measurement taken on White Lights – 6500K</i>	





S30-XXX-W

Working Distance mm (inches)	Pattern (80%-100% measured intensity) mm (Inches)
.5m (19.7")	205mm(~8") D
1m (39.4")	415mm(~16") D
Typical output performance	
Distance = .5 meter	Illumination (Lux) 1300
<i>Illumination measurement taken on White Lights – 6500K</i>	



S30-XXX-L

Working Distance mm (inches)	Pattern (80%-100% measured intensity) mm (Inches)
.5m (19.7")	255mm(~10") H x 115mm(~4.5") V
1m (39.4")	460mm(~18") H x 250mm(~10") V
Typical output performance	
Distance = .5 meter	Illumination (Lux) 1900
<i>Illumination measurement taken on White Lights – 6500K</i>	

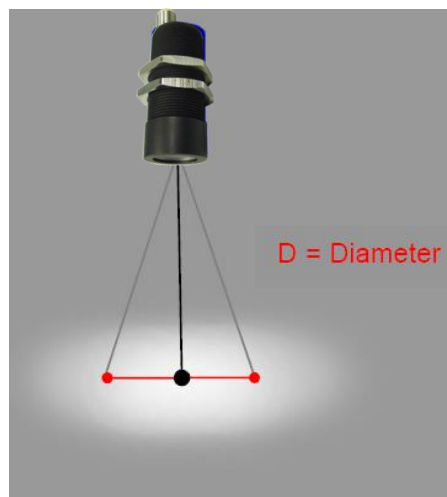



mounting & accessories



Power Cables
5m, 10m, 15m



PB30-M1
Swivel Mount



PB30-M2
Slotted Block Mount



PB30-M3
Slotted Right Angle



PB30-M6
Bolt-on Block Mount



Diffuser Kits
Available



risk group

According to IEC 62471:2006. Full documentation upon request.

Notice

Exempt Group: No photo biological hazard to eyes or skin even for continuous, unrestricted use.
Applicable for wavelengths: 625, 850, and 940.

Caution

Risk Group 1: Possibly hazardous optical radiation emitted from this product. Do not stare at operating lamp. May be harmful to eye. Safe for most applications except prolonged exposures.
Applicable for wavelengths: 395, 470, 505, 530, and WHI.

Notice

Risk Group 1: UV emitted from this product. Minimize exposure to eyes and skin. Use appropriate shielding. Safe for most applications except prolonged exposures.
Applicable for wavelengths: 395

Caution

Risk Group 2: UV emitted from this product. Eye or skin irritation may result from exposure. Use appropriate shielding. Does not pose optical hazard if aversion responses limit exposure.
Applicable for wavelengths: 365